

Alaska Railroad Corporation

ANCHORAGE CAR SHOP BRACE ANGLE REPLACEMENT

WORK UNDER THIS PROJECT SCOPE INCLUDES DEMOLITION OF FIXED LADDER AND CRANE ACCESS PLATFORM, REPLACEMENT OF X BRACE ANGLE LEG AND ATTACHMENT.


DRAWING INDEX:					
DRAWING NO.	DESCRIPTION				
1	TITLE SHEET (THIS DRAWING)				
2	EAST WALL FRAMING GENERAL ARRANGEMENT				
3	DEMOLITION PLAN				
4	CONSTRUCTION PLAN				
5	HEATER SUPPORT DETAILS				
6	BRACE REPLACEMENT DETAILS				

SAFETY

Mandatory Minimum Personal Protective Equipment (PPE): All contractor personnel shall at all times wear at least: Hard hats Safety glasses Safety toe work boots

Fall protection when working from manlift or scissorlift

All workers shall attend a preconstruction safety meeting given by Alaska Raliroad.

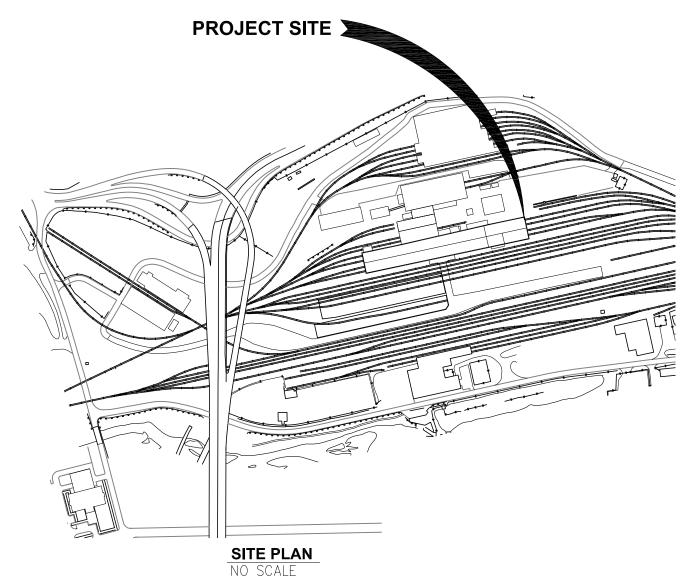




ANCHORAGE WHEEL SHOP X BRACE ANGLE REPLACEMENT

	IIILE:	CAR : SITE		
	DESIGNED BY:	ARRC	SCALE:	





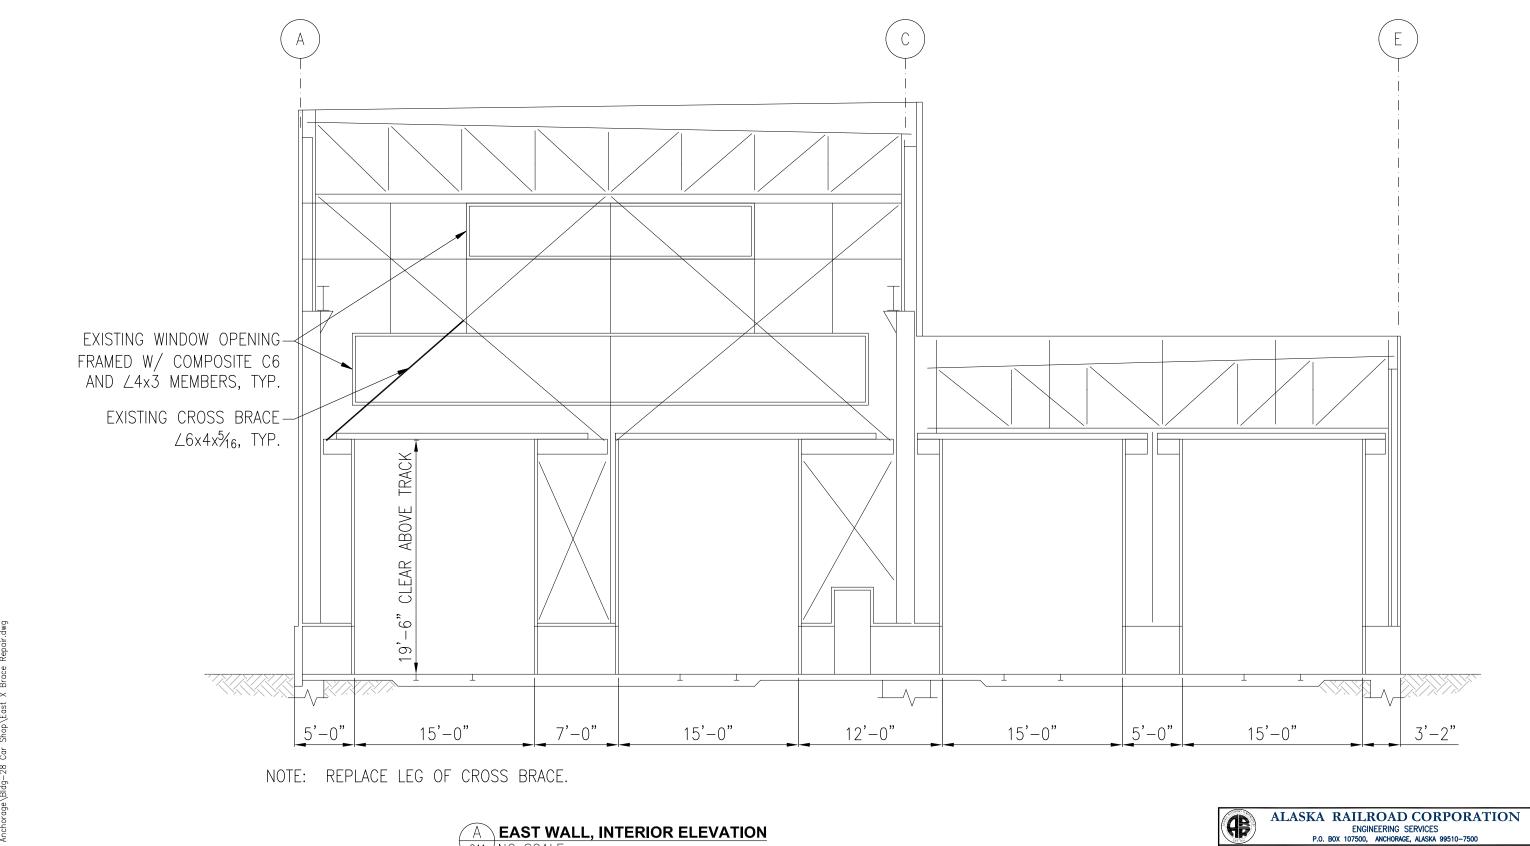



ANCHORAGE CAR SHOP X BRACE ANGLE REPLACEMENT

CAR SHOP EAST WALL FRAMING ELEVATION

				EAS	ST W
				DESIGNED BY:	ARRC
				DRAWN BY:	ARRC
				CHECKED BY:	CDR
REV.	DATE	BY	REVISION	APPROVED BY:	CDR

ACAD FILE: -DWG NO. **2** OF **6**

EAST WALL, PARTIAL INTERIOR ELEVATION NO SCALE

NOTES:

- 1. CRANE ACCESS LADDER AND PLATFORM ARE TO BE REMOVED AND WILL NOT BE REPLACED.
- 2. LEG OF X-BRACE AND PLATE WELDED TO COLUMN ARE TO BE REMOVED AND REPLACED. DO NOT REMOVE LEG OF X-BRACE UNTIL PREPARED TO BE REPLACED.
- 3. TAKE CARE TO AVOID DAMAGING WINDOWS.
- 4. CONTRACTOR IS RESPONSIBLE FOR LOCK OUT TAG OUT OF OVERHEAD CRANE AT ELECTRICAL DISCONNECT SWITCH WHEN WORKING IN OPERATING AREA OF CRANE OR WITHIN 5 FEET OF CRANE ELECTRICAL BUSBARS. COORDINATE CRANE SERVICE DISRUPTION WITH SHOP WORK LEAD.





ALASKA RAILROAD CORPORATION

ENGINEERING SERVICES
P.O. BOX 107500, ANCHORAGE, ALASKA 99510-7500


ANCHORAGE CAR SHOP X BRACE ANGLE REPLACEMENT

CAR SHOP DEMOLITION PLAN

V: AS NOTED

			DESIGNED BY:	ARR
			DRAWN BY:	ARR
			CHECKED BY:	CDR
DATE	BY	REVISION	APPROVED BY:	CDR

ACAD FILE: -DWG NO. 3_ oF_6

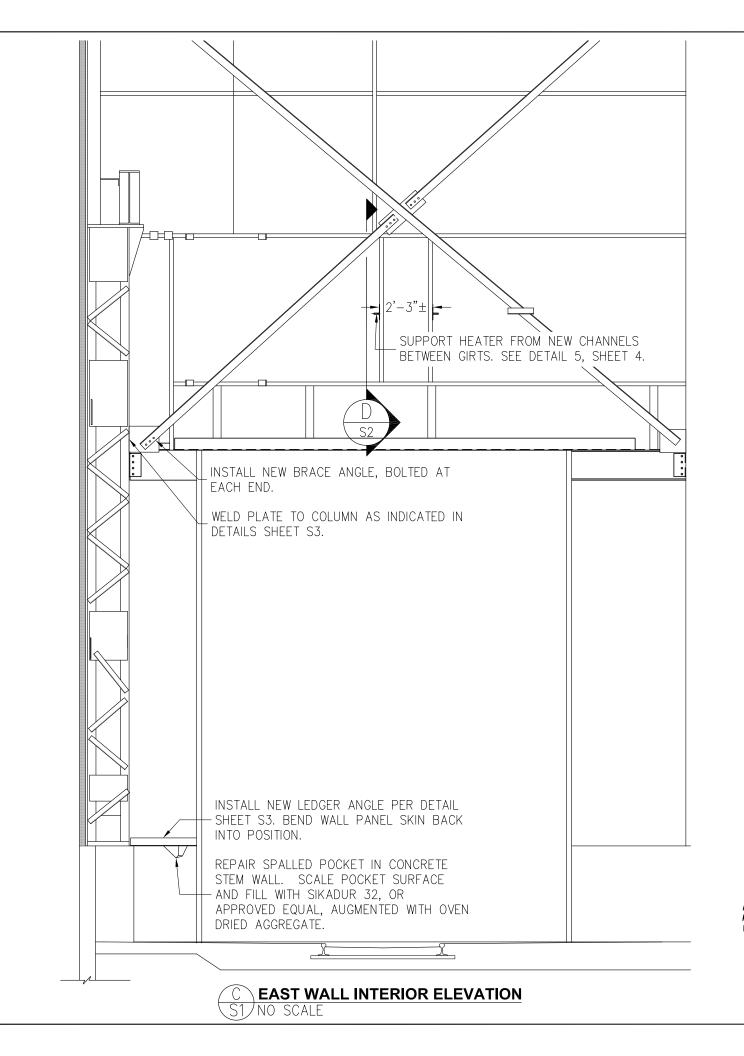

DOCUMENTS INCORPORATED INTO THE SPECIFICATION BY REFERENCE:

- A. ASTM A36, STANDARD SPECIFICATION FOR CARBON STRUCTURAL STEEL.
- B. ASTM A3125, STD. SPECIFICATION FOR HIGH STRENGTH STRUCTURAL BOLTS.
- C. ASTM A563, STD. SPECIFICATION FOR CARBON AND ALLOY STEEL NUTS.
- D. ASTM F436, STD. SPECIFICATION FOR HARDENED STEEL WASHERS.
- E. AMERICAN WELDING SOCIETY STRUCTURAL WELDING CODE, AWS D1.1

MATERIALS:

- A. STRUCTURAL STEEL: ALL SHAPES AND PLATES ASTM A36. THE CONTRACTOR MAY PROPOSE AN ALTERNATIVE SECTION SIZE, OR ALTERNATIVE MATERIAL SPECIFICATION, SUBJECT TO ARRC ACCEPTANCE AND APPROVAL.
- B. BOLTS: ASTM F3125 GRADE A325 TYPE 1
- C. NUTS: ASTM A563DH
- D. WASHERS: ASTM F436 TYPE 1
- E. WELD ELECTRODES SHALL BE COMPATIBLE WITH BASE STEEL MATERIAL PROPERTIES AND SHALL HAVE MINIMUM TENSILE STRENGTH OF 70,000 PSI.

FABRICATION:

- A. ALL WELDERS SHALL BE QUALIFIED FOR THE WELD PROCEDURE PER AWS D1.1.
- B. ALL WELD SPLATTER AND SLAG SHALL BE REMOVED.
- C. CJP WELDS SHALL BE 100% ULTRASONICALLY TESTED.
- D. FILLET WELDS SHALL BE 100% VISUALLY INSPECTED.
- E. DEFECTIVE WELDS SHALL BE REPAIRED PER AWS D1.1 AND RETESTED UNTIL THEY PASS.
- F. FIELD PAINT WELDS AND AFFECTED AREAS AFTER PASSING TESTING.
- G. BOLTS SHALL BE TIGHTEN USING TURN-OF-NUT METHOD, WITH WASHER UNDER TURNED ELEMENT.

COATINGS:

A. ALL STEEL SHALL RECEIVE PRIMER COATING. SHERWIN WILLIAMS STEEL SPEC SHOPCOAT PRIMER. GRAY COLOR, OR APPROVED EQUAL APPLIED PER MANUFACTURE'S INSTRUCTIONS.

SUBMITTALS:

- A. SUBMITTALS LISTED BELOW MUST BE PROVIDED AND APPROVED BY THE OWNER'S REPRESENTATIVE BEFORE COMMENCING FABRICATION WORK:
 - 1. MANUFACTURER CERTIFICATES FOR ALL MATERIALS STATING COMPLIANCE WITH APPLICABLE SPECIFICATION.
 - 2. ALL WELD PROCEDURES.
 - 3. WELDER CERTIFICATES FOR WELDERS ON PROJECT TO SHOW COMPLIANCE.
 - 4. ALL WELD TEST RESULTS.
 - 5. THIRD PARTY WELD TESTING AGENCY.
 - 6. STEEL COATING.



ALASKA RAILROAD CORPORATION

ENGINEERING SERVICES
P.O. BOX 107500, ANCHORAGE, ALASKA 99510-7500

ANCHORAGE CAR SHOP X BRACE ANGLE REPLACEMENT


CONSTRUCTION PLAN ANGLE LEG REPLACEMENT


DRAWN BY: 1 3/10/22CR REMOVED EXTRANEOUS DIMENSION CHECKED BY: REV. DATE BY APPROVED BY: CDR

H: AS NOTED ARRC V: AS NOTED


CDR

ACAD FILE: -**S1** DWG NO. 4 OF 6

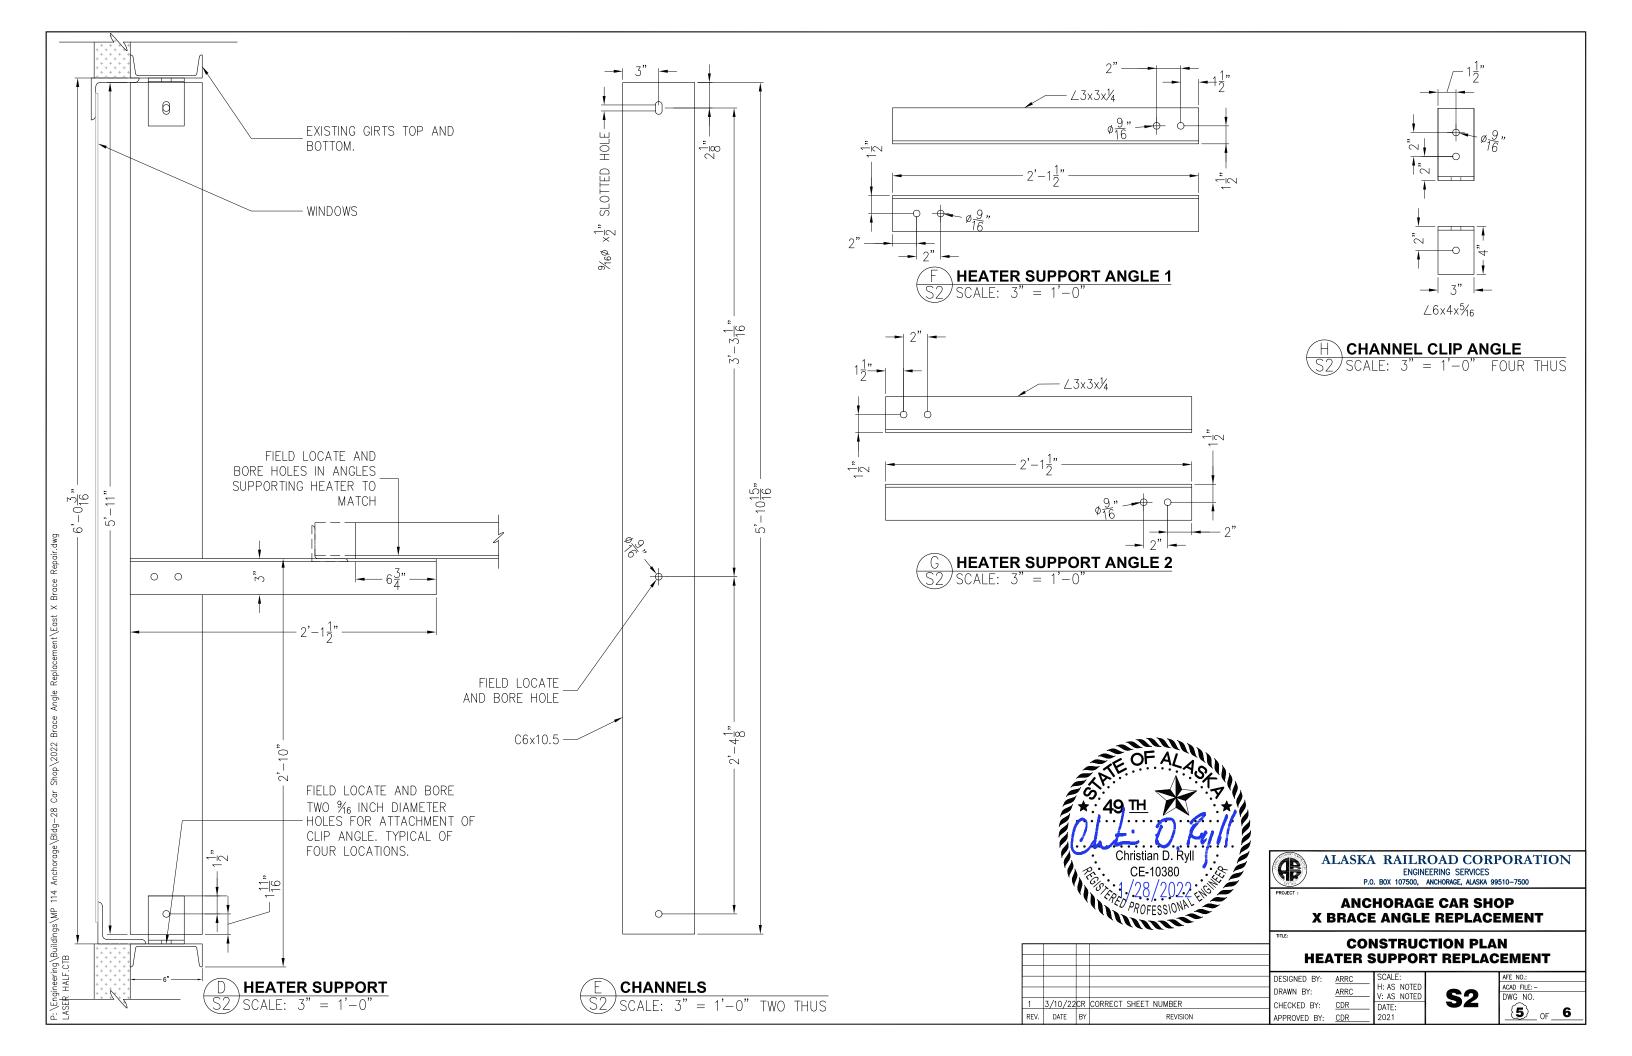

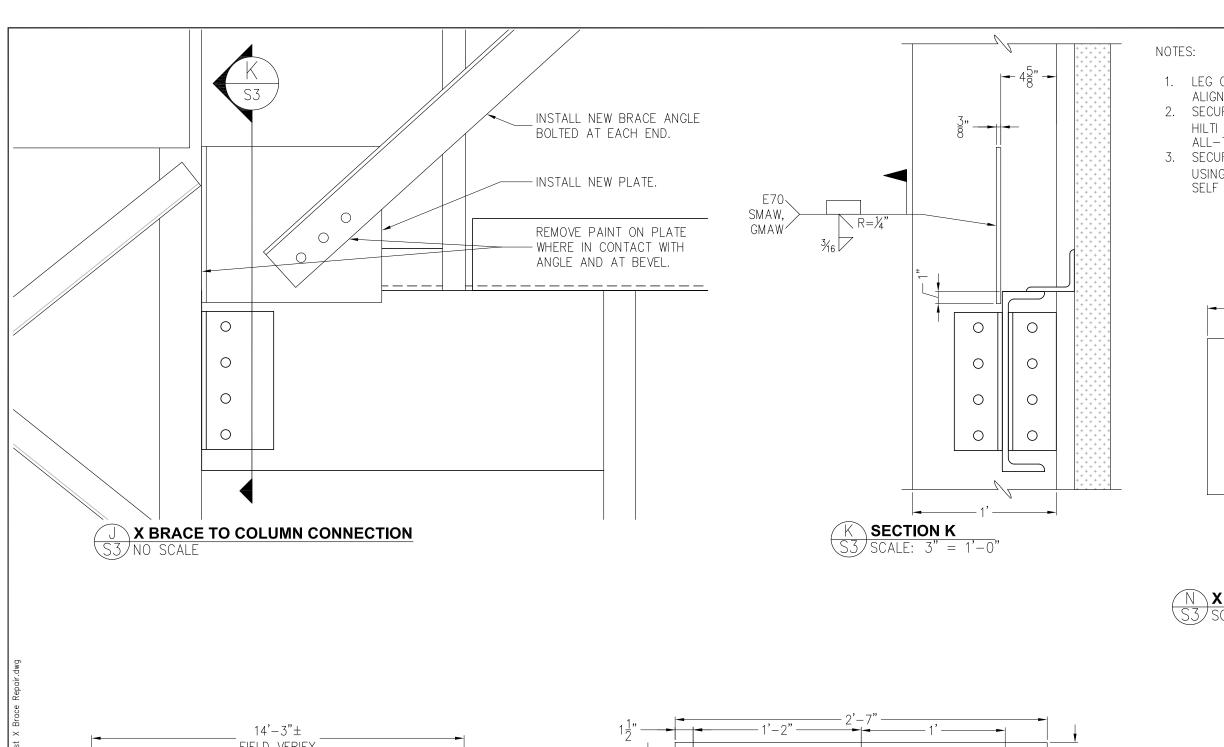

- 1. LEG OF X-BRACE BEING REPLACED TO BE ALIGNED WITH EXISTING OPPOSITE LEG OF BRACE.
- 2. SECURE LEDGER ANGLE TO CONCRETE USING 3 HILTI HAS-E, 8 INCH LONG, ½ INCH DIAMETER, ALL-THREAD AND REDHEAD A7+ ADHESIVE.
- 3. SECURE LEDGER ANGLE TO STEEL WALL PANEL USING SIX #12 TEKS HEX HEAD $1\frac{1}{2}$ INCH LONG SELF DRILLING FASTENERS.

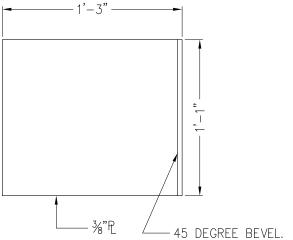







DRAWN BY:

REVISION

ALASKA RAILROAD CORPORATION

ENGINEERING SERVICES
P.O. BOX 107500, ANCHORAGE, ALASKA 99510-7500


ANCHORAGE CAR SHOP X BRACE ANGLE REPLACEMENT

CONSTRUCTION PLAN


ANGLE LEG REPLACEMENT

DESIGNED BY: H: AS NOTED V: AS NOTED ARRC CHECKED BY: CDR APPROVED BY: CDR

ACAD FILE: -**S3** DWG NO. 6 _{OF} 6

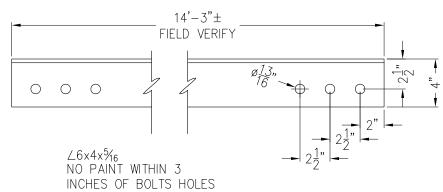



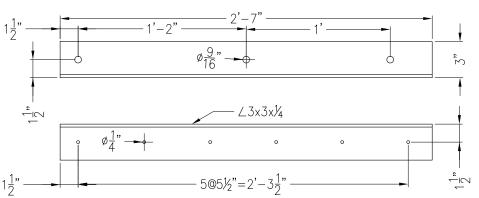

REV. DATE BY

